


Architex®

CERTIFICATE OF FLAME RESISTANCE + SPECIFICATIONS

Architex International hereby certifies that the fabric described passes the following flame resistance specifications:

RELAX

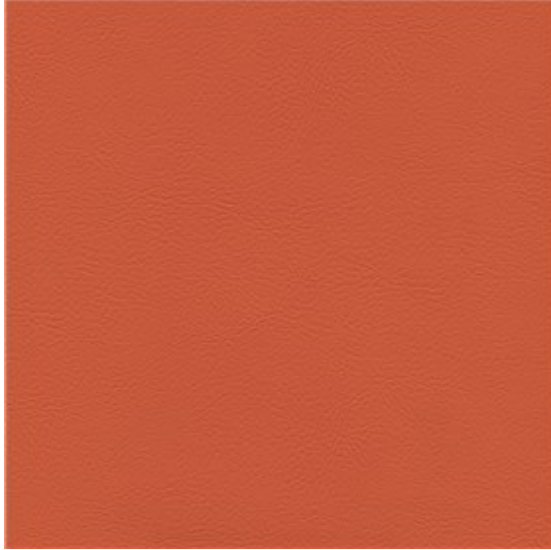

© Architex 2026



Maintenance + Cleaning

WS. Acid, Alcohol, Bleach (1:10), Ozone, Peroxide, Phenolic, Quaternary, UV-C - Based Cleanable
Consult a professional prior to cleaning. For ordinary cleaning, use mild soap and water. For more severe soiling, remove promptly with a non-abrasive cleaner. Rub gently and rinse with water-dampened cloth. Rinse with water dampened cloth to remove cleaner concentration. Kindly spot test an area before cleaning.

Notes

Characteristics

- Usage:** Upholstery
- Collection:** 24/7 Performance Vinyls
- Width:** 54" (137.16 cm)
- Repeat:** None
- Content:** 100% Vinyl
- Backing:** Polyester
- Weight:** 1.625 lb/ly (737.088 gr/lm)
- Country Of Origin:** Colombia

Performance

- Antistatic , Denim Dye Transfer Resistant , Stain Resistant
- Durability:** 100,000 double rubs; Wyzenbeek
- Finish:** Stain Resistant
- Lightfastness:** 1000 hours; Method AATCC 16
- Flammability:** CAL TB 117-2013, NFPA 260/UFAC Class 1

Sustainability

- AB 2998 Compliant
- Antimicrobial Free
- Carbon Neutral
- FR Free
- ISO 14001 Certified Facility
- PFAS Free
- Phthalate Free
- Proposition 65 Compliant
- REACH Compliant

Warranty

See [Terms of Use and Sale](#) for more information.

Architex®

RELAX COLORWAYS



Artichoke



Bluejay



Clay



Coral



Fawn



Fog



Folkstone




Fountain



Heather



Keystone



Laurel



Loyal



Night Owl



Oceanside



Peppercorn



Periwinkle



Pewter



Plum




Porpoise



Primavera




Rookwood




Saffron



Sawgrass



Skyfall



Slate



Wheat