


CERTIFICATE OF FLAME RESISTANCE + SPECIFICATIONS

Architex International hereby certifies that the fabric described passes the following flame resistance specifications:

TAILOR MADE

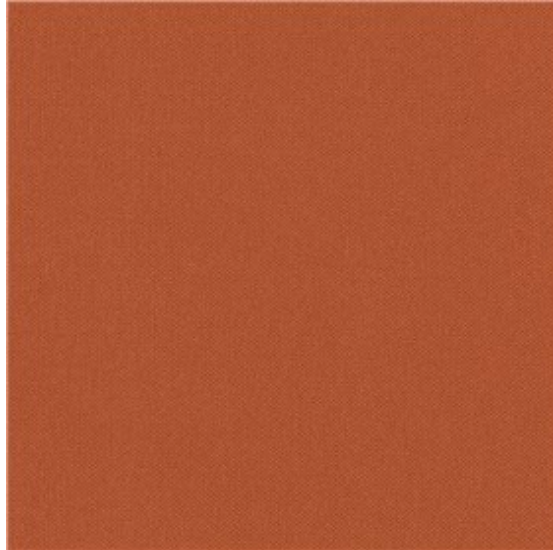

© Architex 2026



Maintenance + Cleaning

WS. Acid, Alcohol, Bleach (1:4), Ozone, Peroxide, Phenolic, Quaternary, UV-C - Based Cleanable
Consult a professional prior to cleaning. For ordinary cleaning, use mild soap and water. For more severe soiling, remove promptly with a non-abrasive cleaner. Rub gently and rinse with water-dampened cloth. May also be cleaned alcohol-based cleaners. Rinse with water dampened cloth to remove cleaner concentration. Kindly spot test an area before cleaning.

Notes

Characteristics

Usage: Upholstery, Outdoor, Cruise Ship (IMO)

Collection: 24/7 Performance Vinyls

Width: 54" (137.16 cm)

Repeat: None

Content: 100% Vinyl

Backing: Polyester

Weight: 1.875 lb/ly (850.486 gr/lm)

Country Of Origin: Costa Rica

Performance

Antistatic , Mildew Resistant , Stain Resistant

Durability: 100,000 double rubs; Wyzenbeek

Finish: Stain Resistant

Lightfastness: 650 hours; Method ASTM G154

Flammability: CAL TB 117-2013, IMO Part 8 , NFPA 260/UFAC Class 1

Sustainability

AB 2998 Compliant

Antimicrobial Free

Carbon Neutral

FR Free

Greenguard

ISO 14001 Certified Facility

PFAS Free

Proposition 65 Compliant

REACH Compliant

Warranty

See [Terms of Use and Sale](#) for more information.

Architex®

TAILOR MADE COLORWAYS



Aristocrat



Avocado



Balkan



Berm



Berry



Canary



Clay



Coin



Forest



Fresque



Frozen



Graphite



Heirloom



Indigo



Iron



Java



Leaf



Lowland



Lucid



Mystic



Passage



Penny



Plum



Rosehip



Rust




Sandal



Seaglass



Shadow



Shamrock



Sheet Metal



Smoke



Spring



Sunset



Tawny



Wireglass